



1 metre high panel, marathon fence and crowd-barrier

## Through the proper channels



*1 metre high panel*

**Looking for the ideal solution for steering crowds in the right direction? Need a system which is light, quick and easy to install? Then Heras has the right solution for you, with a tailor-made product for almost any situation.**



*Marathon fence*

The 1 metre high panel is ideal for segregating cycle lanes and walkways from other road users. Used in combination with recycled footings, this temporary fencing provides a clear dividing line, steering users through the appropriate channels.

The sporting performance of the Marathon fence can best be described as Olympian. The panel system is an ideal method of filtering moving crowds and its lightweight design means that panels can be moved from event to event quickly and easily.



*Crowd-barrier*


The crowd-barrier can be used in more challenging situations, where large crowds need to be kept in check. The interlocking hook-eye system enables easy connection of barriers which means that you can create an effective crowd-control system in next to no time.





The 1 metre high panel is often used for demarcation purposes. It combines the design features of a building site panel with the convenience of a simple barrier. Is ideal, for example, for segregating cycle lanes and walkways.

Frame	42 mm (vertical) x 30 mm (horizontal)
Wall thickness	1,5 mm
Wire thickness	4 mm (vertical and horizontal)
Mesh width	100 mm x 300 mm
Element	3472 mm x 1120 mm
Fastening	hook-eye system
Weight	16 kg

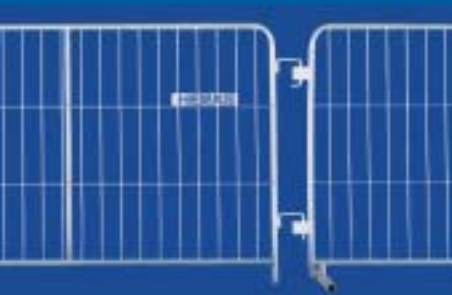

The marathon fence is the ideal solution for filtering moving crowds. Its lightweight design means that panels can be moved and installed quickly and easily. Ideal for sports and other events.

Frame	outer tubing 25 mm, vertical 22 mm
Wall thickness	2 mm
Wire thickness	4,5 mm (vertical and horizontal)
Element	2500 mm x 1020 mm, ground clearance 75 mm
Fastening	hook-eye system
Weight	16 kg



The crowd-barrier is used in situations where large crowds are required to be held in check. The interlocking hook-eye system creates a barrier which is all but impenetrable. The thick tubing and 19 bars provide a stable and robust panel.

Frame	outer tubing 38 mm, vertical 16 mm
Wall thickness	outer tubing 1.5 mm, vertical 1.2 mm
Bars	19, welded around the outside
Element	2500 mm x 1000 mm
Fastening	interlocking hook-eye system
Weight	18 kg

#### Heras Mobile Fencing & Security

PO Box 30, 5688 ZG Oirschot, The Netherlands

tel 00 31 (0)499 - 551 508 fax 00 31 (0)499 - 571 423

e-mail [mobilefencing@heras.com](mailto:mobilefencing@heras.com)

internet [www.heras.com](http://www.heras.com)

